

ISO2-8 for imc CRONOS-XT (CRXT/ISO2-8)

8-channel, isolated differential measurement amplifier

The ISO2-8 is an isolated, differential measurement amplifier with 8 galvanically-separated, floating channels for high-precision measuring:

- Voltage and current (20 mA)
- Temperature (thermocouples and PT100)
- IEPE/ICP sensors (with optional DSUB-15 terminal connector)



CRXT/ISO2-8

Highlights

- Channel-wise isolated, galvanically-separated inputs
- Finely adjustable input voltage range (± 50 mV to ± 60 V)
- High signal bandwidth up to 11 kHz
- Each channel with its own adjustable filter (e.g., anti-aliasing filter) and simultaneous A/D converter
- Supports imc Plug & Measure (Transducer Electronic Data Sheets)

Typical applications

- Ideally suited for measurements with unclear potential conditions such as in-vehicle or in the railway sector.

imc CRONOS-XT - Maximizes flexible modularity

An imc CRONOS-XT system is composed of a base unit and one or more imc CRONOS-XT modules. The imc click mechanism offers a mechanically strong connection between several imc CRONOS-XT modules. At the same time, the "click" establishes an electrical connection to the system bus and the power supply.




Overview of available variants

Order Code	Signal connections	power consumption	weight	housing	article no.
CRXT/ISO2-8	DSUB-15	7 W	0.7 kg	XT1	11100017
CRXT/ISO2-8-SUPPLY	DSUB-15	12.4 W	0.8 kg	XT1	11100058
CRXT/ISO2-8-L	LEMO	7 W		XT2	11100028

Integrated sensor supply

- The CRXT/ISO2-8-**SUPPLY** variant with an integrated sensor supply, requires no extra module expansion. This variant is equipped with adjustable supply voltages (globally selectable for 8 channels), output on reserved pins.

Dimensions

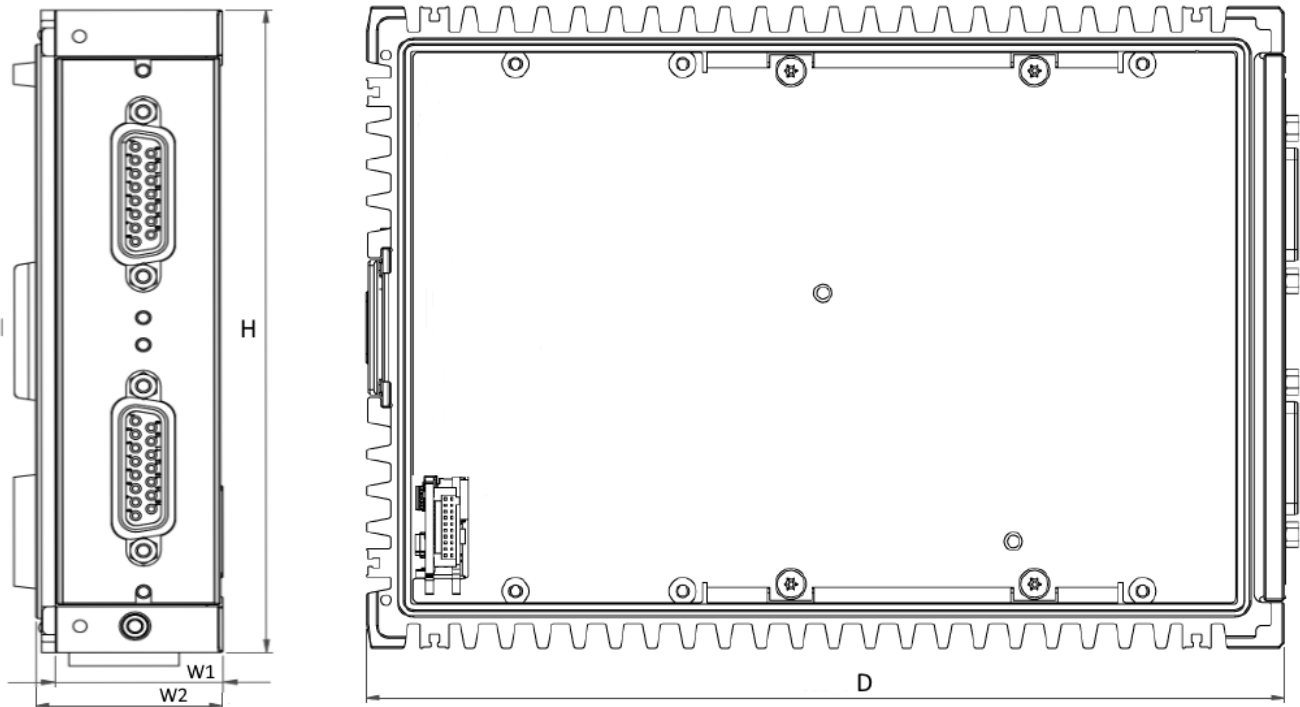

Shown in standard operating orientation: housing type XT1

Housing type:	XT1	XT2	XT3	XT4	Remarks
W: Width in mm	30.5	61	91.5	116.9	W1: modular spacing (effective stacking width) W2: complete width
	34	64.5	95	120.4	
H: Height in mm	130				
D: Depth in mm	186.5				

Sealing, IP rating and environmental specs

A single CRXT slice cannot achieve an IP protection level at first because it is functionally open at the side. The specified specifications are always only valid for a complete in a controlled environment clicked (closed) CRXT system. Only after it has been combined with a CRXT base unit (plus power module), CRXT slices if applicable, and the final handles to form a CRXT system can an evaluation be made. The specification for shock, vibration and IP degree of protection applicable to the entire device is then derived from the weakest specification of the CRXT slices used in this combination. They assume that the individual CRXT slices are each mounted in conjunction with the additional stabilizing interconnect brackets (included in the standard accessories supplied).

The module variants with LEMO sockets are equipped with LEMO.1B connection sockets, which meet the IP65 degree of protection. This determines the upper limits for the sealing of the complete system equipped with it.

According to IEC 60529 the Ingress Protection (IP) rating refer to protection classes provided by a housing, the protection of the electrical parts within the housing shell. If all functionally accessible contacts of the sockets are also to be protected, the corresponding plugs must be connected to all sockets. In many cases, a protective

cover can also be used alternatively on unused sockets.

Included accessories

Sealing Caps and mounting accessories		
2x ACC/CAP-DSUB-15-IP67	Sealing Cap IP67 for DSUB-15 sockets	13500342
2x CRXT/BRACKET-CON	interconnect brackets, intended for increased stability	11100040
Miscellaneous		
Calibration certificate with test equipment verification as per ISO 9001 (manufacturer's calibration certificate, PDF)		
Getting started with imc CRONOS-XT (one copy per delivery)		

Optional accessories

DSUB-15 plug (solder) IP67		
CRXT/DSUB15M-IP67	IP67 DSUB-15 plug male	11100073
DSUB-15 plugs (IP65)		
ACC/DSUBM-T4-IP65	IP65 DSUB-15 plug with screw terminals for 4-channel measurement of voltages as well as temperatures with PT100 and thermocouples with integrated cold junction compensation (CJC).	13500217
ACC/DSUBM-TEDS-T4-IP65	sealed IP65 TEDS version	13500332
ACC/DSUBM-I4-IP65	IP65 DSUB-15 plug with screw terminals for 4-channel current measurement of up to 50 mA (50 Ω shunt, scaling factor: 0.02 A/V)	13500328
ACC/DSUBM-TEDS-I4-IP65	sealed IP65 TEDS version	13500333
ACC/DSUBM-U4-IP65	IP65 DSUB-15 plug with screw terminals for 4-channel voltage measurem.	13500216
ACC/DSUBM-TEDS-U4-IP65	sealed IP65 TEDS version	13500330
DSUB-15 extension plugs for two IEPE transducers (no IP65 rating)		
ACC/DSUBM-ICP2I-BNC-S	ICP2I (isolated, 2x BNC) ¹ , slow	13500293
ACC/DSUBM-ICP2I-BNC-F	ICP2I (isolated, 2x BNC) ¹ , fast	13500294
Dust protection caps		
ACC/CAP-DSUB-15	dust protection cap for DSUB-15	13500339
ACC/CAP-LEMO.1B	dust protection cap for LEMO.1B sockets (and XT-Con)	13500233
Miscellaneous		
CRXT/CAL-P Calibration report set for each device	Report set with manufacturer's calibration certificate and individual readings, as well as list of test equipment used (PDF). Meets requirements of ISO 17025	11100071
ACC/DSUBM-LOCKING-BOLT-L	extended length locking bolts (2 pcs) For the slices with DSUB-15 sockets, the sealed terminal plugs ACC/DSUBM-xxx-IP65 must be used - regardless of the sealing properties: The simple standard plug (ACC/DSUBM-xxx without suffix [-IP65]) have shorter locking screws and therefore cannot be fixed to CRXT slices. However, they can be retrofitted with the long bolts. With long bolts: only for CRXT, with short standard bolts: only for CRFX, CRC, C-SERIE etc.	13500327

¹ When using the 2-channel plug only two channels (first and third channel) out of four are usable.

Technical Specs - ISO2-8

Inputs, measurement modes, terminal connection		
Parameter	Value	Remarks
Inputs	8	
Measurement modes DSUB-15	voltage measurement current measurement thermocouple, RTD (PT100) current fed sensors	shunt plug (ACC/DSUBM-I4) thermo plug (ACC/DSUBM-T4) with IEPE DSUB-15 expansion plug: ACC/DSUB-ICP4, not isolated ACC/DSUBM-ICP21-BNC-S/-F ¹ , isolated
Measurement modes LEMO	voltage measurement current measurement RTD (PT100)	differential (internal shunt)
Terminal connection Standard	2x DSUB-15 or	4 channels per plug
LEMO	8x LEMO.1B.307	1 channel per plug

Sampling rate, Bandwidth, Filter, TEDS		
Parameter	Value	Remarks
Sampling rate	≤100 kHz ≤10 kHz	per channel at temperature measurement
Bandwidth	0 Hz to 11 kHz 0 Hz to 8 kHz 0 Hz to 1 kHz	-3 dB -0.2 dB -0,1 dB at temperature measurement
Filter (digital) cut-off frequency characteristic type and order	2 Hz to 5 kHz	Butterworth, Bessel low pass filter: 8th order high pass filter: 4th order band pass: LP 4th and HP 4th order Anti-aliasing filter: Cauer 8.order with $f_{\text{cut-off}} = 0.4 f_a$
Resolution	16 Bit 24 Bit	output format is selectable for each channel individually: a) 16 Bit Integer b) 32 Bit Float (24 Bit Mantissa)
TEDS - Transducer Electronic DataSheets	conforming to IEEE 1451.4 Class II MMI	esp. with ACC/DSUBM-TEDS-xx (DS2433) not supported: DS2431 (typ. IEPE/ICP sensor)
Characteristic curve linearization	user defined (max. 1023 supporting points)	

- 1 When using the two-channel IEPE plug in combination with the analog inputs, which provide four channels per socket, only channels 1 and 3 can be used. Only the IEPE base functionality is supported by this module, see also TD ACC/DSUBM-ICP21-BNC.

General			
Parameter	Value typ.	min. / max.	Remarks
Isolation	galvanically isolated		channel-to-channel and against system ground (housing, CHASSIS, PE), as well as against common reference of all PT100 current sources and TEDS. not isolated when using ICP plug and PT100 mode
nominal rating	±60 V		
test voltage	±300 V (10 s)		
Overvoltage protection	±60 V ESD 2 kV transient protection: automotive load dump ISO 7637		differential input voltage, continuous human body model $R_i=30 \Omega$, $t_d=300 \mu s$, $t_r<60 \mu s$
Input coupling	DC		
Input configuration	differential, isolated		
Input impedance	6.7 M Ω 1 M Ω 50 Ω		range $\leq \pm 2$ V and temperature mode range $\geq \pm 5$ V or device powered down with shunt plug ACC/DSUBM-I4
Input current			for operation
operating conditions		1 nA	$ V_{in} > 5$ V on ranges $< \pm 5$ V
on overvoltage condition		1 mA	or device powered-down
Auxiliary supply			for IEPE/ICP plug
voltage	+5 V	±5 %	independent of optional
available current	>0.26 A	>0.2 A	sensor supply, short circuit proof
internal resistance	1.0 Ω	<1.2 Ω	power per DSUB-plug
Voltage measurement			
Parameter	Value typ.	min. / max.	Remarks
Voltage input ranges	±60 V / ±50 V / ±25 V / ±10 V ±5 V / ±2 V / ±1 V / ±500 mV ±250 mV / ±100 mV / ±50 mV		
Gain error	<0.02 %	<0.05 %	of the measured value, at 25 °C
Gain drift		6 ppm/K · ΔT_a 50 ppm/K · ΔT_a	ranges $\leq \pm 2$ V ranges $\geq \pm 5$ V over full temp. range
Offset error	0.02 %	<0.05 %	of the measurement range, at 25 °C
Offset drift		2.5 ppm/K · ΔT_a	over entire temperature range $\Delta T_a = T_a - 25^\circ C $ ambient temperature T_a
Non-linearity	<120 ppm		range ± 10 V
Signal noise	2.5 μV_{rms} 20 μV_{pkpk}		bandwidth 0.1 Hz to 1 kHz; in the range: ± 50 mV
IMR (isolation mode rejection)	140 dB 64 dB	>130 dB >60 dB	range $\leq \pm 2$ V range $\geq \pm 5$ V $R_{source} = 0 \Omega$, $f=50$ Hz
Channel isolation	>1 G Ω , <40 pF		channel-to-ground / CHASSIS (case)
	>1 G Ω , <10 pF		channel-to-channel
Channel isolation (crosstalk)	>165 dB (50 Hz) >92 dB (50 Hz)		range $\leq \pm 2$ V range $\geq \pm 5$ V $R_{source} \leq 100 \Omega$

Current measurement with shunt plug			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	$\pm 40 \text{ mA} / \pm 20 \text{ mA} / \pm 10 \text{ mA}$ $\pm 5 \text{ mA} / \pm 2 \text{ mA} / \pm 1 \text{ mA}$		
Shunt impedance	50 Ω		external plug ACC/DSUBM-I4
Input configuration	differential		
Gain error	<0.02 %	<0.05 % <0.1%	of the measured value, with 25 °C additional error of 50 Ω in plug
Gain drift		6 ppm/K $\cdot \Delta T_a$ 50 ppm/K $\cdot \Delta T_a$	ranges $\leq \pm 2 \text{ V}$ over entire temp. range ranges $\geq \pm 5 \text{ V}$
Offset error	0.02 %	<0.05 %	of the measurement range
Offset drift		2.5 ppm/K $\cdot \Delta T_a$	over entire temperature range $\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a

Current measurement with internal shunt (variant with round connector etc.)			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	$\pm 40 \text{ mA} / \pm 20 \text{ mA} / \pm 10 \text{ mA}$		
Shunt impedance	50 Ω		internal
Input configuration	differential		
Gain error	<0.02 %	<0.05 %	of the measured value, with 25 °C
Gain drift		30 ppm/K $\cdot \Delta T_a$	over entire temperature range
Offset error	0.02 %	<0.05 %	of the measurement range
Offset drift		2.5 ppm/K $\cdot \Delta T_a$	over entire temperature range $\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a

Temperature measurement - thermocouples			
Parameter	Value typ.	min. / max.	Remarks
Measurement mode	R, S, B, J, T, E, K, L, N		
Measurement range	-270°C to 1370°C -270°C to 1100°C -270°C to 500°C		type K
Resolution	0.063 K (1/16 K)		16-Bit integer
Measurement error		< $\pm 0,6 \text{ K}$ < $\pm 1.0 \text{ K}$ < $\pm 1.5 \text{ K}$	type K, range -150°C to 1200°C type T, range -150°C to 400°C type N, range 380°C to 1200°C type K, range -200°C to -150°C type T, range -200°C to -150°C type N, range -200°C to 380°C
Temperature drift	$\pm 0.02 \text{ K/K} \cdot \Delta T_a$		$\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a
Error of cold junction compensation		< $\pm 0.15 \text{ K}$	with ACC/DSUBM-T4
Temperature drift	$\pm 0.001 \text{ K/K} \cdot \Delta T_a$		$\Delta T_a = T_a - 25^\circ\text{C} $ ambient temperature T_a

Temperature measurement – PT100		
Parameter	Value	Remarks
Measurement range	-200°C to +850°C -200°C to +250°C	
Resolution	0.063 K (1/16 K)	
Gain error	<±0.05%	of measured value (corresponding resistance)
Offset error	<±0.2 K	with 4-wire configuration
Offset drift	±0.01 K/K ΔT _a	ΔT _a = T _a -25°C ambient temperature T _a
Sensor feed	250 μA	non-isolated

Sensor supply (only with variant: CRXT/ISO2-8-SUPPLY)				
Parameter	Value typ.		max.	Remarks
Configuration options	5 selectable settings			The sensor supply module always has 5 selectable voltage settings. default selection: +5 V to +24 V
Output voltage	Voltage (+2.5 V) +5.0 V +10 V +12 V +15 V +24 V (±15 V)	Current 580 mA 580 mA 300 mA 250 mA 200 mA 120 mA 190 mA	Netpower 1.5 W 2.9 W 3.0 W 3.0 W 3.0 W 2.9 W 3.0 W	set jointly for all eight channels optional, special order: +12 V or 15 V can be replaced by +2.5 V preferred selection with 2.5 V: +2.5 V, +5.0 V, +10 V, +12 V, +24 V Special order: +15 V can be replaced by ±15 V.
Short-circuit protection	unlimited duration			to output voltage reference ground
Accuracy of output voltage	<0.25 %		0.5 % 0.9 % 1.5 %	at terminals, no load at 25°C over entire temperature range plus with optional bipolar output voltage
Max. capacitive load	>4000 μF >1000 μF >300 μF			2.5 V to 10 V 12 V, 15 V 24 V