

LV3-8 for imc CRONOS-XT (CRXT/LV3-8)

8-channel differential measurement amplifier

The LV3-8 is a differential measurement amplifier with 8 channels for the measurement of:

- Voltage and current (20 mA)
- IEPE/ICP sensors (with optional DSUB-15 plug)

Highlights

- High-resolution measuring of current and voltage
- Finely adjustable input voltage range (± 5 mV to ± 50 V)
- High signal bandwidth up to 48 kHz
- Each channel with its own adjustable filter (e.g., anti-aliasing filter) and simultaneous A/D converter
- Supports imc Plug & Measure (Transducer Electronic Data Sheets)



CRXT/LV3-8
(Fig. similar)

Typical applications

- Ideally suited for measurements of signals, voltage-based sensors as well as 20 mA process variables with higher bandwidths.

imc CRONOS-XT - Maximizes flexible modularity

An imc CRONOS-XT system is composed of a base unit and one or more imc CRONOS-XT modules. The imc click mechanism offers a mechanically strong connection between several imc CRONOS-XT modules. At the same time, the "click" establishes an electrical connection to the system bus and the power supply.




Overview of available variants

Order Code	Signal connections	power consumption	weight	housing	article no.
CRXT/LV3-8	DSUB-15	6.4 W	0.7 kg	XT1	11100018
CRXT/LV3-8-SUPPLY	DSUB-15	12.4 W	0.8 kg	XT1	11100056

Integrated sensor supply

- The CRXT/LV3-8-**SUPPLY** variant with an integrated sensor supply, requires no extra module expansion. This variant is equipped with adjustable supply voltages (globally selectable for 8 channels), output on reserved pins.

Dimensions

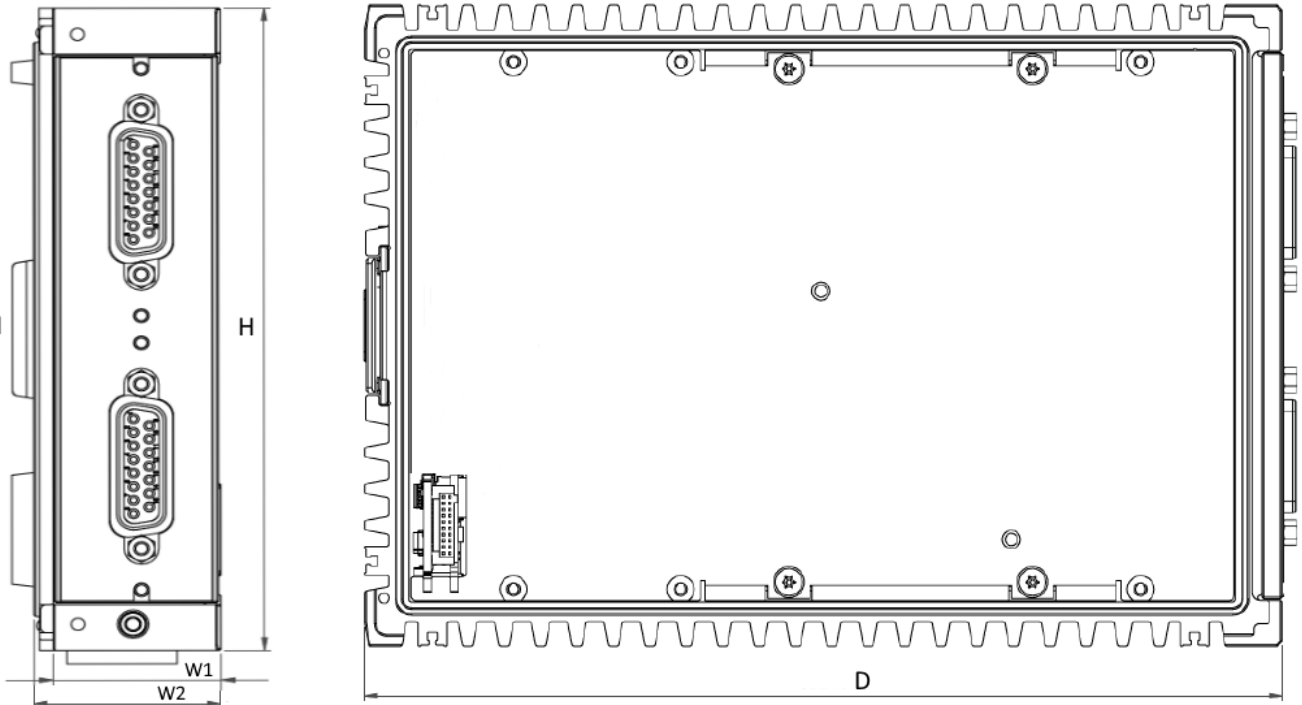

Shown in standard operating orientation: housing type XT1

Housing type:	XT1	XT2	XT3	XT4	Remarks
W: Width in mm	30.5	61	91.5	116.9	W1: modular spacing (effective stacking width) W2: complete width
	34	64.5	95	120.4	
H: Height in mm	130				
D: Depth in mm	186.5				

Sealing, IP rating and environmental specs

A single CRXT slice cannot achieve an IP protection level at first because it is functionally open at the side. The specified specifications are always only valid for a complete in a controlled environment clicked (closed) CRXT system. Only after it has been combined with a CRXT base unit (plus power module), CRXT slices if applicable, and the final handles to form a CRXT system can an evaluation be made. The specification for shock, vibration and IP degree of protection applicable to the entire device is then derived from the weakest specification of the CRXT slices used in this combination. They assume that the individual CRXT slices are each mounted in conjunction with the additional stabilizing interconnect brackets (included in the standard accessories supplied).

According to IEC 60529 the Ingress Protection (IP) rating refer to protection classes provided by a housing, the protection of the electrical parts within the housing shell. If all functionally accessible contacts of the sockets are also to be protected, the corresponding plugs must be connected to all sockets. In many cases, a protective cover can also be used alternatively on unused sockets.

Included accessories

Sealing Caps and mounting accessories		
2x ACC/CAP-DSUB-15-IP67	Sealing Cap IP67 for DSUB-15 sockets	13500342
2x CRXT/BRACKET-CON	interconnect brackets, intended for increased stability	11100040
Miscellaneous		
Calibration certificate with test equipment verification as per ISO 9001 (manufacturer's calibration certificate, PDF)		
Getting started with imc CRONOS-XT (one copy per delivery)		

Optional accessories

DSUB-15 plug (solder) IP67		
CRXT/DSUB15M-IP67	IP67 DSUB-15 plug male	11100073
DSUB-15 plugs (IP65)		
ACC/DSUBM-I4-IP65	IP65 DSUB-15 plug with screw terminals for 4-channel current measurement of up to 50 mA (50 Ω shunt, scaling factor: 0.02 A/V)	13500328
ACC/DSUBM-TEDS-I4-IP65	sealed IP65 TEDS version	13500333
ACC/DSUBM-U4-IP65	IP65 DSUB-15 plug with screw terminals for 4-channel voltage measurement	13500216
ACC/DSUBM-TEDS-U4-IP65	sealed IP65 TEDS version	13500330
DSUB-15 extension plug for two IEPE transducers (IP65)		
CRXT/DSUB-ICP2-IP65	IP65 DSUB-15 plug with 2 PG for cable with diameter 2.5 to 3 mm ²	11100064
DSUB-15 extension plugs for two IEPE/ICP transducers (no IP65 rating)		
ACC/DSUBM-ICP2I-BNC-S	ICP2I (isolated, 2x BNC), slow ⁽¹⁾	13500293
ACC/DSUBM-ICP2I-BNC-F	ICP2I (isolated, 2x BNC), fast ⁽¹⁾	13500294
Sealing caps		
ACC/CAP-DSUB-15	dust protection cap for DSUB-15	13500339
Miscellaneous		
CRXT/CAL-P Calibration report set for each device	Report set with manufacturer's calibration certificate and individual readings, as well as list of test equipment used (PDF). Meets requirements of ISO 17025	11100071
ACC/DSUBM-LOCKING-BOLT-L	extended length locking bolts (2 pcs) For the slices with DSUB-15 sockets, the sealed terminal plugs ACC/DSUBM-xxx-IP65 must be used - regardless of the sealing properties: The simple standard plug (ACC/DSUBM-xxx without suffix [-IP65]) have shorter locking screws and therefore cannot be fixed to CRXT slices. However, they can be retrofitted with the long bolts. With long bolts: only for CRXT, with short standard bolts: only for CRFX, CRC, C-SERIE etc.	13500327

1 When using the 2-channel plug only two channels (first and third channel) out of four are usable.

Technical Specs - LV3-8

Inputs, measurement modes, terminal connection		
Parameter	Value	Remarks
Inputs	8	
Measurement modes DSUB	voltage measurement current measurement current feed sensors	shunt plug (ACC/DSUBM-I4) with DSUB-15 expansion plug: ACC/DSUB-ICP4, not isolated ACC/DSUBM-ICP2I-BNC-S/-F ¹ , isolated
Terminal connection Standard	2x DSUB-15	4 channels per plug
Sampling rate, Bandwidth, Filter, TEDS		
Parameter	Value	Remarks
Sampling rate	≤100 kHz	per channel
Bandwidth	0 Hz to 48 kHz 0 Hz to 30 kHz	-3 dB -0.1 dB
Filter (digital) cut-off frequency characteristic order	10 Hz to 20 kHz	Butterworth, Bessel low pass or high pass filter: 8th order band pass: LP 4th and HP 4th order Anti-aliasing filter: Cauer 8.order with $f_{\text{cutoff}} = 0.4 f_s$
Resolution	16 Bit 24 Bit	output format is selectable for each channel individually: a) 16 Bit Integer b) 32 Bit Float (24 Bit Mantissa)
TEDS	conforming to IEEE 1451.4 Class II MMI	esp. with ACC/DSUBM-TEDS-xx (DS2433) supports also: DS2431 (typ. IEPE/ICP sensor)
Characteristic curve linearization	user defined (max. 1023 supporting points)	

- 1 When using the two-channel IEPE plug in combination with the analog inputs, which provide four channels per socket, only channels 1 and 3 can be used.

General			
Parameter	Value typ.	min. / max.	Remarks
Overvoltage protection		±80 V ±50 V	permanent, differential input range >±10 V or device switched off input range ≤±10 V
Input coupling	DC		
Input configuration	differential		
Input impedance	1 MΩ 20 MΩ		range >±10 V range ≤±10 V
Auxiliary supply			for IEPE/ICP expansion plug independent of optional sensor supply, short circuit proof power per DSUB-plug
voltage	+5 V	±5%	
available current	>0.26 A	>0.2 A	
internal resistance	1.0 Ω	<1.2 Ω	
Voltage measurement			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	±50 V, ±25 V, ±10 V, ±5V, ±2.5 V, ±1 V... ±5 mV		
Maximum input voltage		-11 V to +15 V	between ±IN and CHASSIS; input range ≤±10 V
Gain error	0.02 %	0.05 %	of the reading
Gain drift	10 ppm/K·ΔT _a	30 ppm/K·ΔT _a	ΔT _a = T _a - 25 °C ; ambient temperature T _a
Offset error	0.02 %	≤0.05 % ≤0.06 % ≤0.15 %	of the range, at 25 °C >±50 mV ≤±50 mV ≤±10 mV
Offset drift	±40 μV/K·ΔT _a ±0.7 μV/K·ΔT _a ±0.1 μV/K·ΔT _a	±200 μV/K·ΔT _a ±6 μV/K·ΔT _a ±1.1 μV/K·ΔT _a	range >±10 V range ±10 V to ±0.25 V range ≤±0.1 V ΔT _a = T _a - 25 °C ambient temperature T _a
Nonlinearity	30 ppm	≤90 ppm	
Common mode rejection ranges	±50 V to ±25 V ±10 V to ±50 mV ±20 mV to ±5 mV	80 dB 110 dB 138 dB	>70 dB >90 dB >132 dB
			Common mode voltage (DC..60 Hz): ±50 V ±10 V ±10 V
Noise	3.6 μV _{rms} 0.6 μV _{rms} 0.14 μV _{rms}	5.5 μV _{rms} 1.0 μV _{rms} 0.26 μV _{rms}	bandwidth 0.1 Hz to 50 kHz 0.1 Hz to 1 kHz 0.1 Hz to 10 Hz

Current measurement with shunt plug			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	±50 mA, ±20 mA, ±10 mA, ±5 mA, ±2 mA, ±1 mA		50 Ω shunt in terminal plug
Over load protection		±60 mA	permanent
Maximum input voltage		-11 V to +15 V	between ±IN and CHASSIS
Input configuration	differential		50 Ω shunt in terminal plug
Gain error	0.02 %	≤0.06 % ≤0.1 %	of reading plus error of 50 Ω shunt
Gain drift	+15 ppm/K·ΔT _a	+55 ppm/K·ΔT _a	ΔT _a = T _a -25 °C ; ambient temperature T _a
Offset error	0.02 %	≤0.05 %	of the range
Current noise	40 nA _{rms} 0.7 nA _{rms} 0.17 nA _{rms}	70 nA _{rms} 12 nA _{rms} 0.3 nA _{rms}	Bandwidth: 0.1 Hz to 50 kHz 0.1 Hz to 1 kHz 0.1 Hz to 10 Hz

Sensor supply module (LV3-8-SUPPLY, LV3-8-L-SUPPLY)			
Parameter	Value typ.	max.	Remarks
Configuration options	5 selectable settings		The sensor supply module always has 5 selectable voltage settings. default selection: +5 V to +24 V
Output voltage	Voltage (+2.5 V) +5.0 V +10 V +12 V +15 V +24 V (±15 V)	Current 580 mA 580 mA 300 mA 250 mA 200 mA 120 mA 190 mA	Netpower 1.5 W 2.9 W 3.0 W 3.0 W 3.0 W 2.9 W 3.0 W
Short-circuit protection	unlimited duration		to output voltage reference ground
Accuracy of output voltage	<0.25 %	0.5 % 0.9 % 1.5 %	at terminals, no load at 25°C over entire temperature range plus with optional bipolar output voltage
Max. capacitive load	>4000 μF >1000 μF >300 μF		2.5 V to 10 V 12 V, 15 V 24 V